EagleBurgmann
a member of EKK and FREUDENBERG

RELY ON EXCELLENCE

MF95N

Mechanical Seals | Mechanical seals for pumps | Metal bellows seals

Features

- For unstepped shafts
- Rotating bellows
- Single Seal
- Balanced
- Independent of direction of rotation
- Roller bellows

Advantages

- For extreme temperature ranges
- No dynamically loaded O-Ring
- Very good self cleaning effect
- Suitable for low-end sterile applications

Operating range

Shaft diameter:
d1 = 14 ... 100 mm (0.55" ... 3.94")
Temperature:
t = -40 °C ...+220 °C (-40 °F ... +428 °F)
Pressure: p = 16 bar (232 PSI)
Sliding velocity: vg = 20 m/s (66 ft/s)
Axial movement: ± 0.5 mm

Materials

Seal face: Silicon carbide (Q12), Carbon graphite resin impregnated (B), Carbon graphite antimony impregnated (A)
Seat: Silicon carbide (Q1)
Bellows: Hastelloy® C-276 (M5)
Metal parts: CrNiMo steel (G1)

Standards and approvals

- EN 12756

Recommended applications

- Hot media
- Cold media
- Highly viscous media
- Process industry
- Oil and gas industry
- Refining technology
- Chemical industry
- Pharmaceutical industry
- Pulp and paper industry
- Food and beverage industry
- Pumps
- Special rotating equipment

eagleburgmann.com
info@eagleburgmann.com

All technical specifications are based on extensive tests and our many years of experience. The diversity of possible applications means, however, that they can serve only as guide values.
We must be notified of the exact conditions of application before we can provide any guarantee for a specific case. Subject to change.

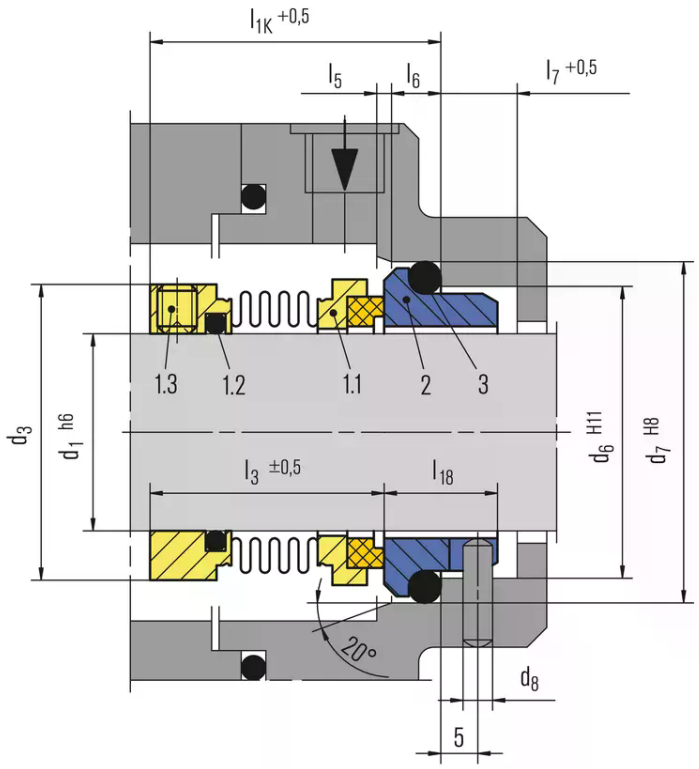

Item	Part no.DIN 24250	Description
1.1	472/481	Seal facewith bellows unit
1.2	412.1	O-Ring
1.3	904	Set screw
2	475	Seat (G16)
3	412.2	O-Ring

Product variants

MF90N
Shaft diameter:
d1 = 14 ... 100 mm (0.55" ... 3.94")
Temperature:
t = -40 °C ...+220 °C (-40 °F ... +428 °F)
Internally pressurized: p = 10 bar (145 PSI),
stationary seat lock necessary.
Sliding velocity: vg = 20 m/s (66 ft/s)
Axial movement: ±0.5 mm

All technical specifications are based on extensive tests and our many years of experience. The diversity of possible applications means, however, that they can serve only as guide values.
We must be notified of the exact conditions of application before we can provide any guarantee for a specific case. Subject to change.

Dimensions

d_1	d_3	d_6	d_7	d_8	l_{1K}	l_3	l_5	l_6	l_7	l_{18}
14	24	21	25	3	35.0	30.5	1.5	4	8.5	15.0
16	26	23	27	3	35.0	29.5	1.5	4	8.5	15.0
18	32	27	33	3	37.5	30.5	2.0	5	9.0	15.0
20	34	29	35	3	37.5	30.5	2.0	5	9.0	15.0
22	36	31	37	3	37.5	30.5	2.0	5	9.0	15.0
24	39	33	39	3	40.0	33.0	2.0	5	9.0	15.0
25	39	34	40	3	40.0	33.0	2.0	5	9.0	15.0
28	42	37	43	3	42.5	35.5	2.0	5	9.0	15.0
30	44	39	45	3	42.5	35.5	2.0	5	9.0	15.0
32	46	42	48	3	42.5	35.5	2.0	5	9.0	15.0
33	47	42	48	3	42.5	35.5	2.0	5	9.0	15.0
35	49	44	50	3	42.5	35.5	2.0	5	9.0	15.0
38	54	49	56	4	45.0	37.0	2.0	6	9.0	16.0
40	56	51	58	4	45.0	37.0	2.0	6	9.0	16.0
43	58	54	61	4	45.0	37.0	2.0	6	9.0	16.0
45	61	56	63	4	45.0	37.0	2.0	6	9.0	16.0
48	64	59	66	4	45.0	37.0	2.0	6	9.0	16.0
50	66	62	70	4	47.5	38.0	2.5	6	9.0	17.0
53	69	65	73	4	47.5	38.0	2.5	6	9.0	17.0
55	71	67	75	4	47.5	38.0	2.5	6	9.0	17.0
58	78	70	78	4	52.5	42.0	2.5	6	9.0	18.0
60	80	72	80	4	52.5	42.0	2.5	6	9.0	18.0
63	83	75	83	4	52.5	42.0	2.5	6	9.0	18.0
65	85	77	85	4	52.5	42.0	2.5	6	9.0	18.0
68	87	81	90	4	52.5	41.5	2.5	7	9.0	18.5
70	90	83	92	4	60.0	48.5	2.5	7	9.0	19.0
75	99	88	97	4	60.0	48.5	2.5	7	9.0	19.0
80	104	95	105	4	60.0	48.5	3.0	7	9.0	19.0
85	109	100	110	4	60.0	48.5	3.0	7	9.0	19.0
90	114	105	115	4	65.0	52.0	3.0	7	9.0	20.5
95	119	110	120	4	65.0	52.0	3.0	7	9.0	20.5
100	124	115	125	4	65.0	52.0	3.0	7	9.0	20.5

Dimensions in millimeter

All technical specifications are based on extensive tests and our many years of experience. The diversity of possible applications means, however, that they can serve only as guide values.
We must be notified of the exact conditions of application before we can provide any guarantee for a specific case. Subject to change.